


# LK By-pass

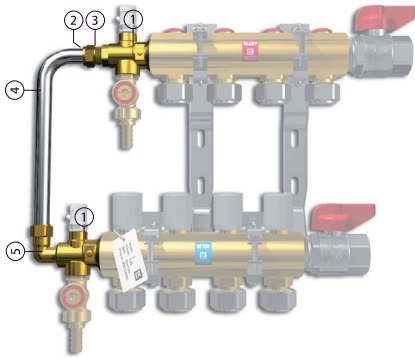

## ASSEMBLY

Mount the two replacement end caps, plus the air valve and filling valves the later are packed with the manifold. Now assemble the Bypass pipe and its throttle plate. Carry out a pressure test to check that there is no leakage. The by-pass can be fitted both to the right and to the left.

1. End cap  
(with side outlet for by-pass)
2. Throttle plate
3. Straight connection
4. By-pass pipe Ø 12
5. Angle connection

## DESIGN

LK By-pass VKF Article no. 241 78 43 is a complete kit for mounting on LK Heating Circuit Manifold VKF-i. The Bypass pipe Ø 12 is fitted with a throttle plate corresponding to Kvs 0.05.

